



the right way at home



SAVE YOUR ENERGY

BYOU



**MADE IN
ITALY**



BEAUTY

Kit for opening swinging gates

Irreversible 24 Vdc electromechanical operator for the automation of swinging gates up to 2 m long. Beauty is characterised by its reduced dimensions which allow practical wiring and fast and easy installation. Mechanical stop and possibility of operation even in the absence of electric power thanks to its batteries. Anti-crushing system with amperometric detection. Rolled screw with spherical section allowing maximum sturdiness, silent operation and very easy manual movement. Unlocked with a key.





KIT BEAUTY


- 2 24 Vdc Operators
- 1 24 Vdc Control unit with built in receiver
- 2 433,92 Mhz, 3 channels transmitters



BEAUTY



TECHNICAL DATA / DATOS TÉCNICOS	BEAUTY
Power supply / Alimentación	230 Vac
Motor supply / Alimentación motor	24 Vdc
Absorbed Power / Absorción de potencia	80 W
Max. absorbed current / Max. absorción de corriente	3,5 A
Thrust / Empuje	1500 N
90° Opening time / Tiempo para abrir 90°	12/18"
Operation cycle / Ciclo de trabajo	intensive use / uso intensivo
Protection level / Grado de protección	IP 44
Operating temp. / Temp. funcionamiento	-20°C / +70°C
Lubrication / Lubricación	grease / grasa
Standard stroke 300 mm / Carrera standard 300 mm	with mechanical stops / con topes mecánicos
Standard stroke 360 mm / Carrera standard 360 mm	without mechanical stops / sin topes mecánicos
Leaf max dimension / Longitud hoja	2,0 m
Weight / Peso	4,2 Kg

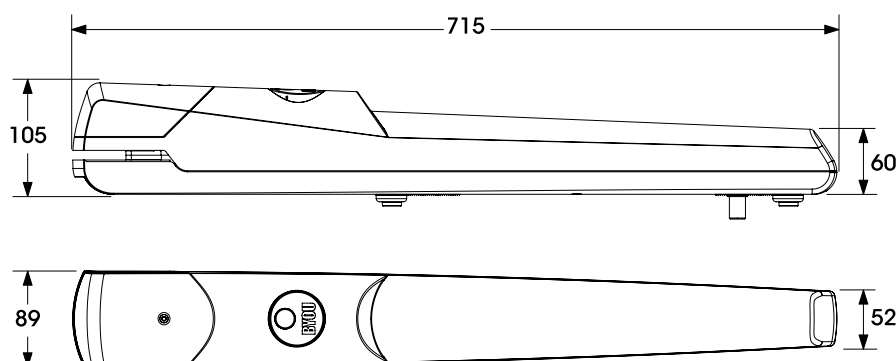

INSTALLATIONS LIMITS / CONDICIONES DE INSTALACIÓN

Leaf dimension L. Máx hojas	Max Weight Peso Máx
1,5 m	260 Kg
1,8 m	220 Kg
2 m	200 Kg