MB24 MBF24



ARTICULATED ARM

with integrated control unit personalised release key


up to 2.5 m

BENINCA



24 Vdc | intensive use

- 24 Vdc self-locking electromechanical operator for intensive use equipped with strong, articulated and anti-shearing arm
- Suitable for gates installed on large posts
- Tempered steel mechanical features to guarantee sturdiness and solidity
- Operation guaranteed even in the event of a power supply failure through batteries
- Amperometric sensor obstacle detection system to prevent crushing
- Equipped with open and close limit switches
- Option of adjustable wire unlock device that allows opening from the outside in the event of a power supply failure

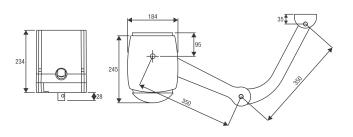




CONTROL UNITS:

BRAINY24+ BRAINY24

MB24 -



A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	α
0	470	350	243	140	90°
50	470	339	255	140	90°
100	470	331	262	140	90°
150	470	328	264	140	90°
185	470	356	237	160	90°
200	440	410	160	200	90°
0	420	244	318	200	110°
100	420	262	310	200	105°

TECHNICAL DATA	MB24
Power supply	
Motor supply	24 Vdc
Max absorbed current	6.2 A
Torque	180 Nm
Opening time	10"
Duty/cycle	intensive use
Prot <mark>ection level</mark>	IP44
Buil <mark>t-in</mark> control unit	NO -
Operating temperature	-20°C /+50°C
Leaf max dimension	2.5 m
Weight	8. <mark>2</mark> kg
Items no. per pallet	39
Kit weight	25.4 kg