



PR.45E24

BRAINY24+  
BRAINY24

**up to 4.0 m**


# BENINCA




**100%**  
Made in Italy



Arm not included

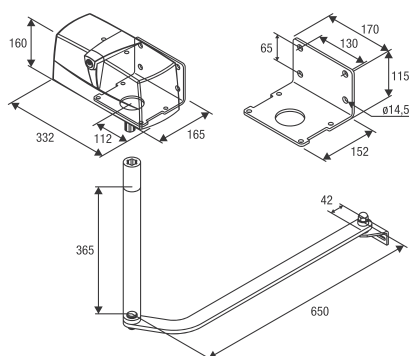


- Irreversible 24 Vdc geared motor for intensive use
- Amperometric sensor obstacle detection system to prevent crushing
- Optional battery powered operation



<b>A (mm)</b>	<b>B (mm)</b>	<b>C (mm)</b>	<b>D (mm)</b>
50	883	277	429
150	851	181	466
200	828	117	475
250	800	32	469
300	846	28	468

TECHNICAL DATA	PR.45E24*
Power supply	230 Vac (50-60Hz)
Motor supply	24 Vdc
Max absorbed current	9 A
Torque	320 Nm
Opening time	9"
Duty cycle	intensive use
Protection level	IP44
Operating temperature	-20°C /+50°C
Leaf max dimension	3 m
Weight	9 kg
Items no. per pallet	42
Kit weight	34 kg

34 kg



24 Vdc

9 A

320 Nm

9"

intensive use

IP44

-20°C / +50°C

3 m

9 kg

# AUTOMATIC GATE SOLUTIONS