



SMALL KIT
FOR
BIFOLDING
SWING GATES

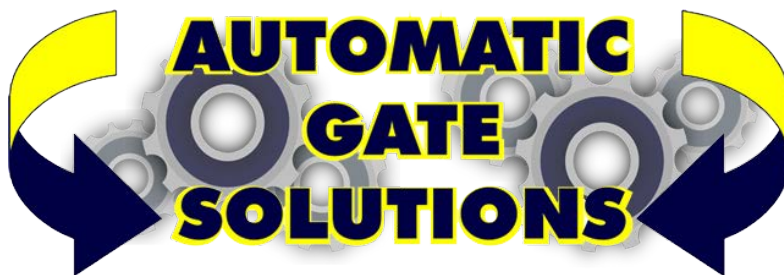

www.automaticgatesolutions.com.au

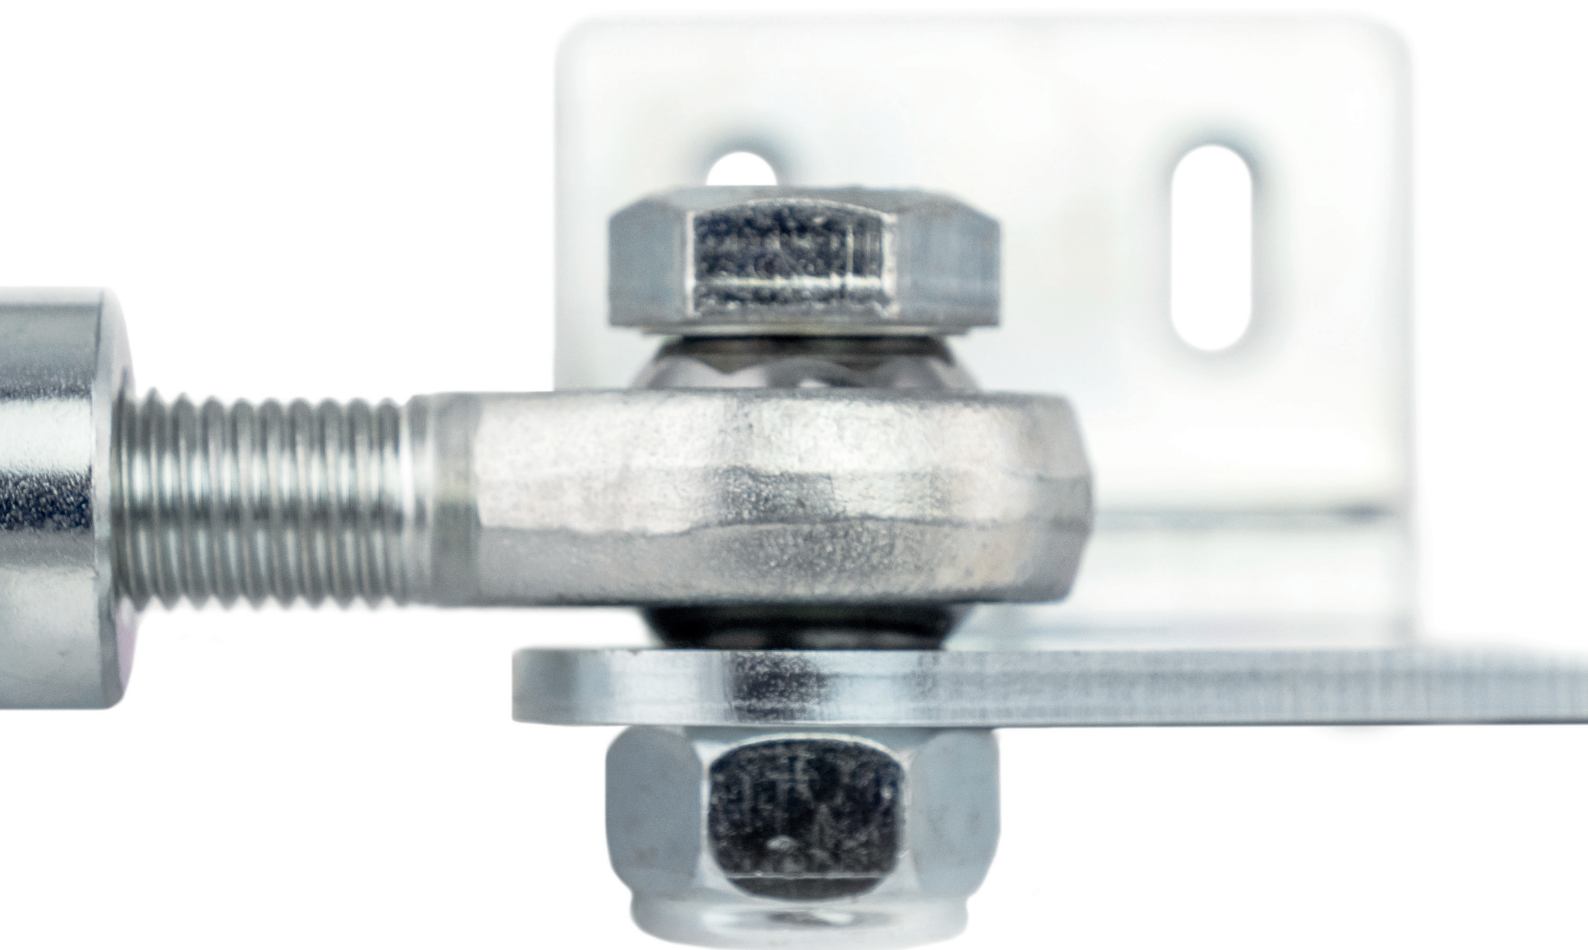

Made in Italy

What to consider before installing a swing gate

Whether in residential or industrial settings, the first thing to do is to make sure there's enough space within the manoeuvre area to install a swing gate.

Why choose a bifolding swing gate

A bifolding swing gate is the ideal choice when there's not enough room for a 1- or 2-leaf swing gate.

HI-MOTIONS has designed a range of accessories for swing gates installed in industrial, commercial and residential settings.

This kit – designed and developed for leaves measuring up to **2 m** and weighing up to **200 kg** – consists of a side bracket and a central rod to connect the two leaves.


Why choose HI-MOTIONS systems

- These systems adapt to any situation or setting
- The galvanised steel accessories allow you to make accurate adjustments, thus making installation easier




BASIC KIT

500.B00

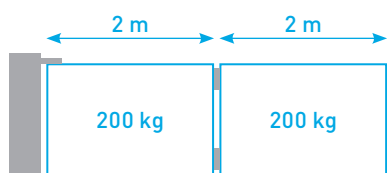


Use limitations may change depending on the hinges and bolt-on bearing hinges used

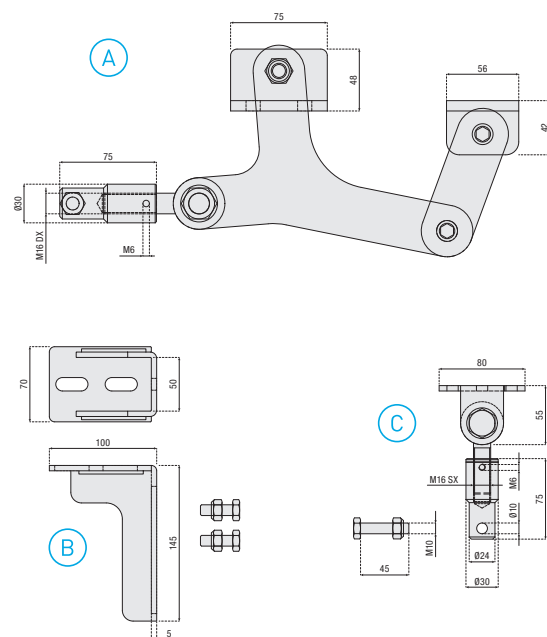

		
A	Adjustable connecting rod	1
B	Adjustable pivot bracket	1
C	Joint bracket	2

Black aluminium
double hinge



LOAD CAPACITY
(of two hinges
of the same leaf)

581.10	150 kg	2
--------	--------	---






Spacer
(30x3 mm, round)




Pipes used to make the spacer:

- 28x2 mm (square or round)
- 30x3 mm (square or round)
- 35x4 mm (square or round)
- 1" sch 40 (Ø 33,4x3,38)
(square or round)

501.31 2,75 m

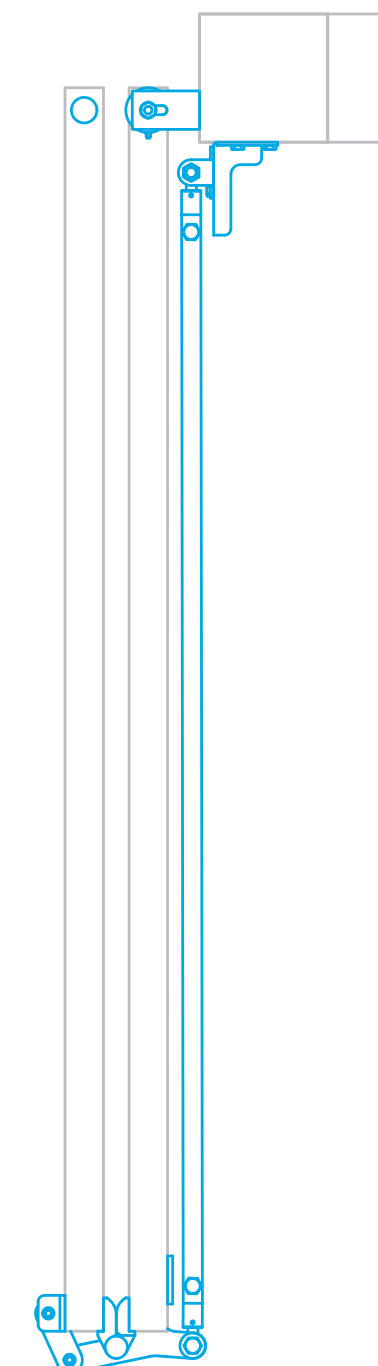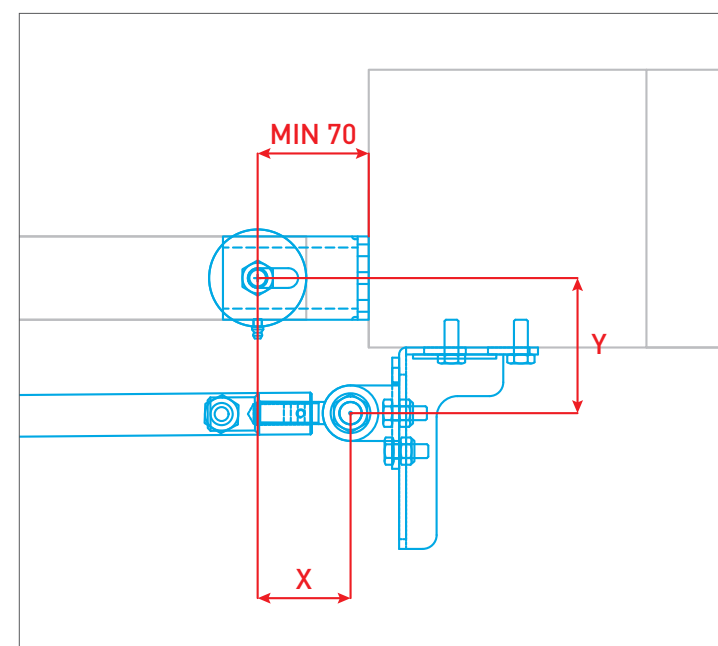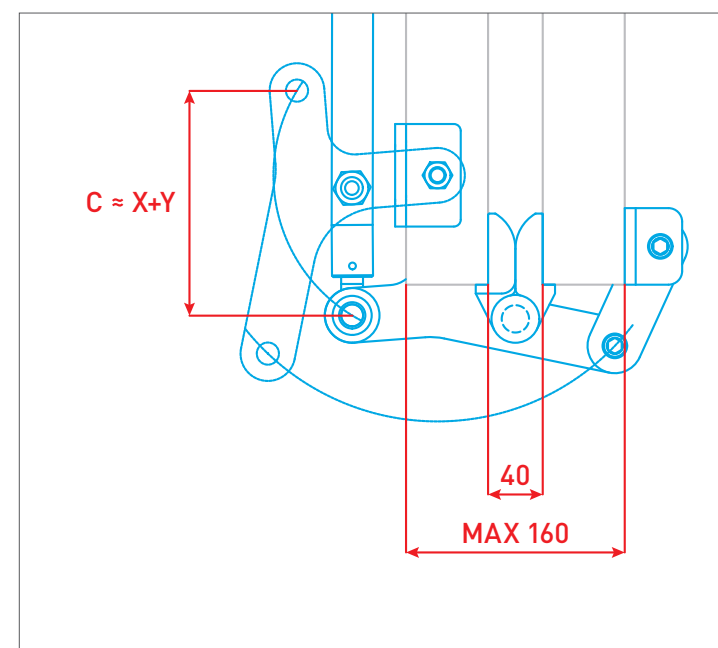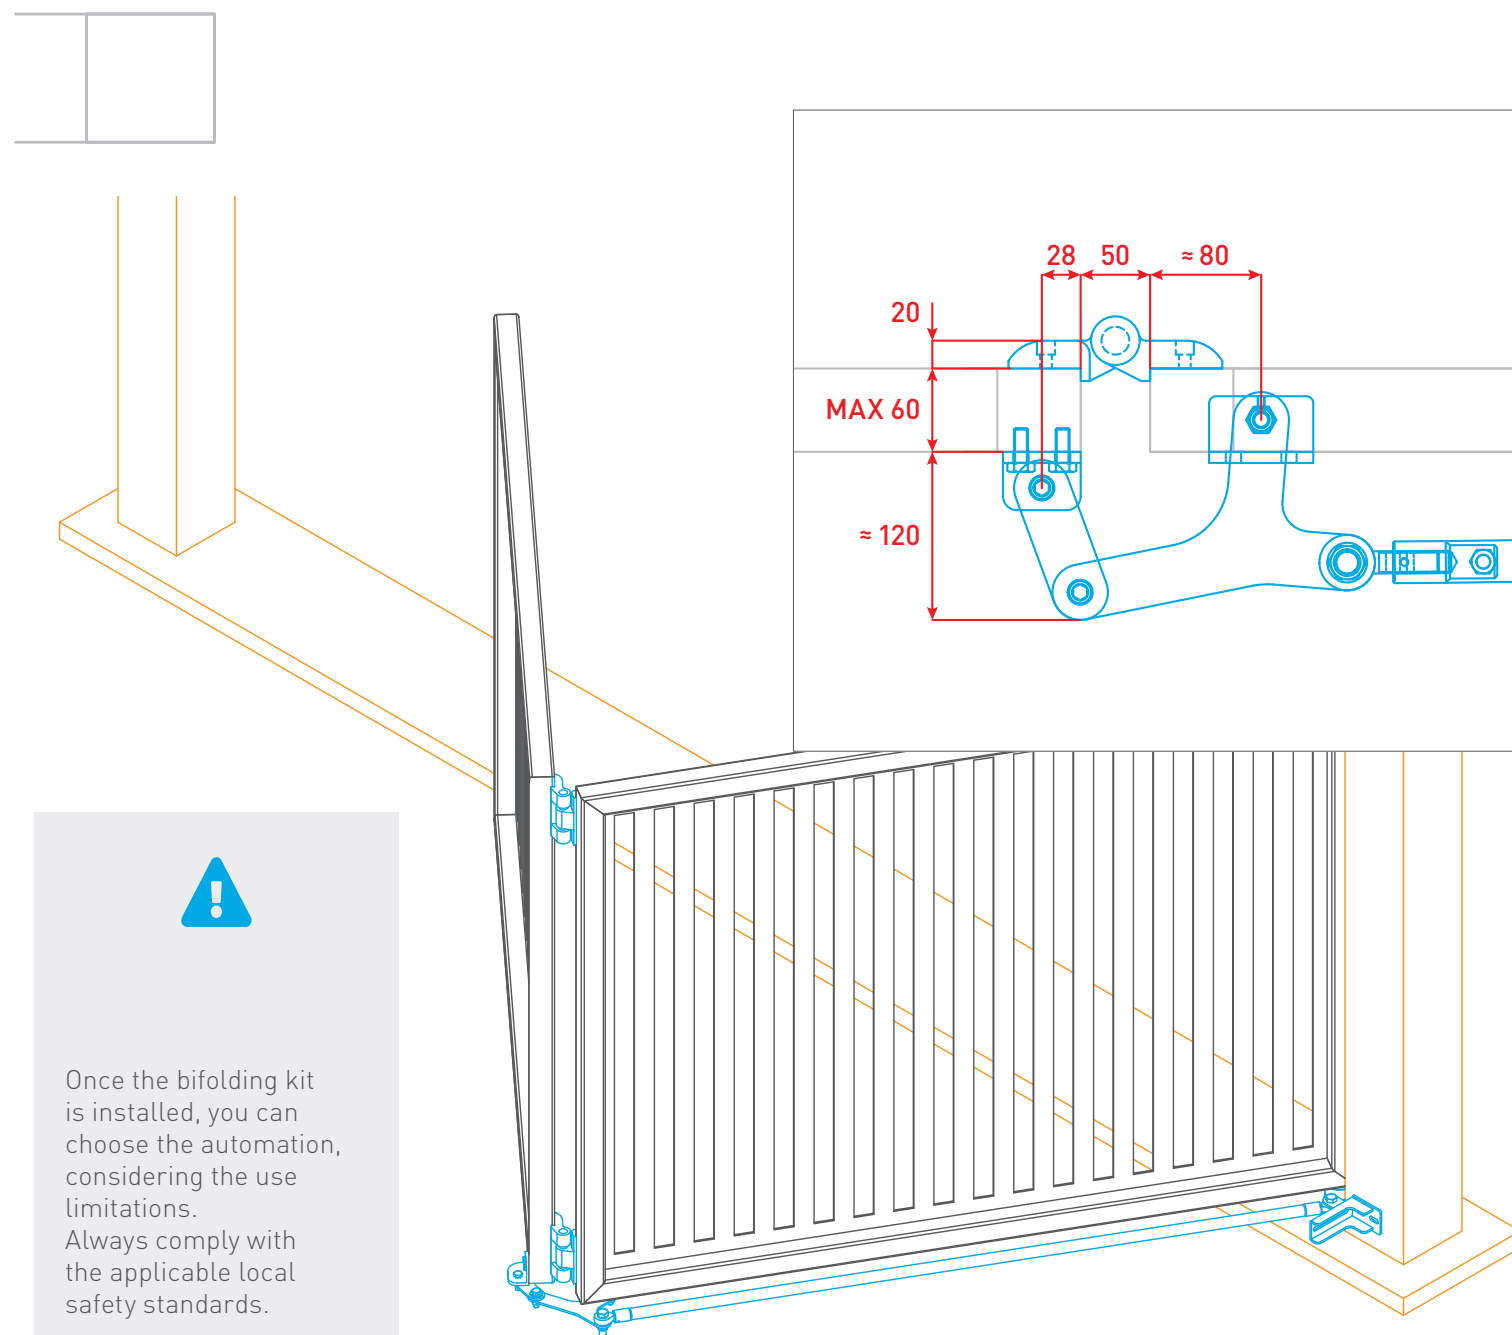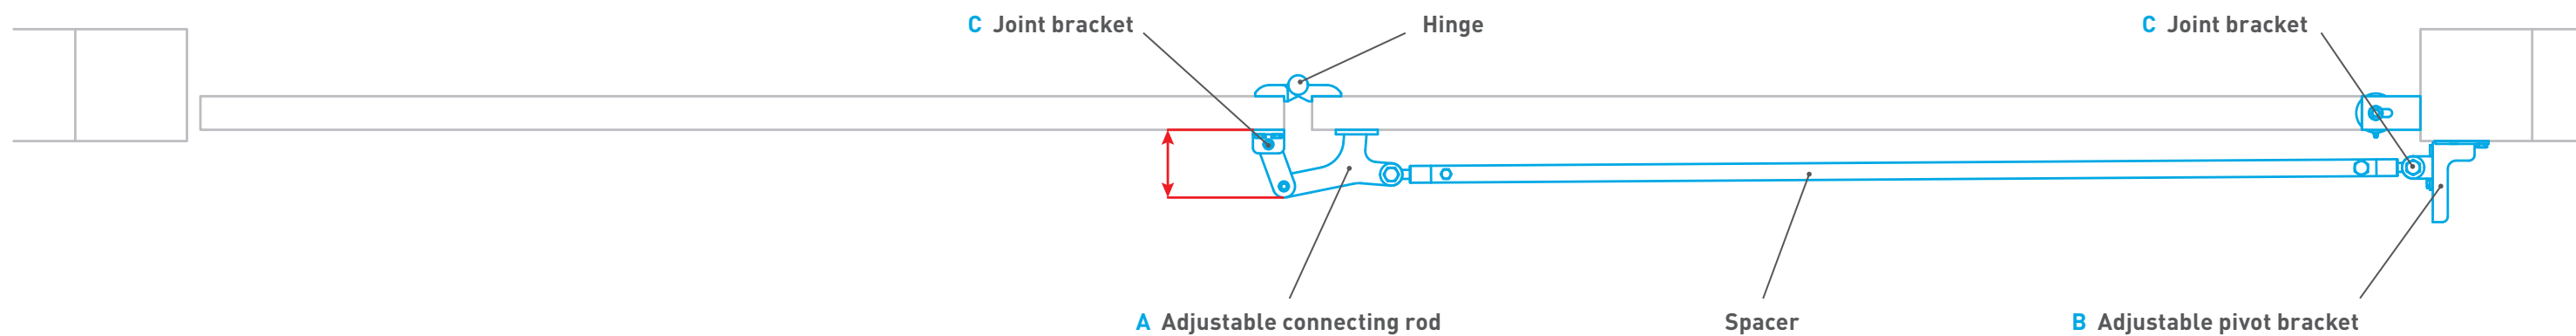

Once the bifolding kit is installed, you can choose the automation, considering the use limitations. Always comply with the applicable local safety standards.

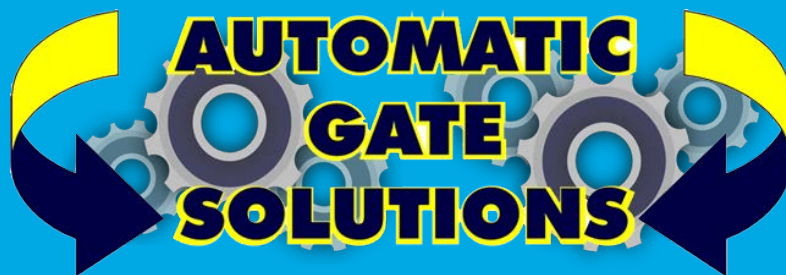

www.automaticgatesolutions.com.au